





Electrical Characteristics






PARAMTETER	SYMBOL	UNIT	TEST CONDITIONS	Typ.	Max.






YJD106540NCTQG2

RoHS
COMPLIANT

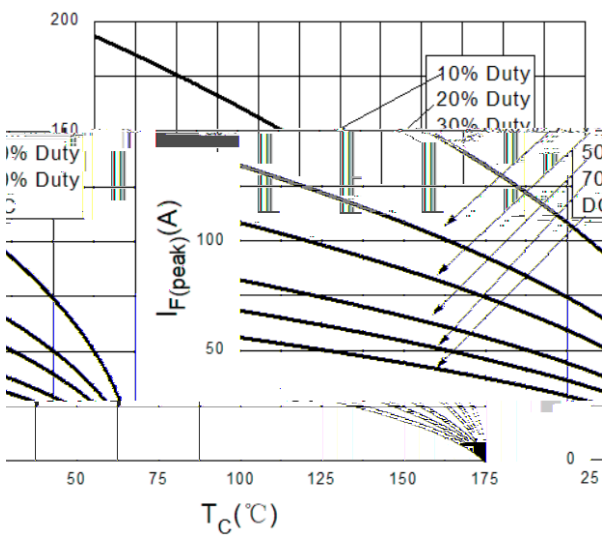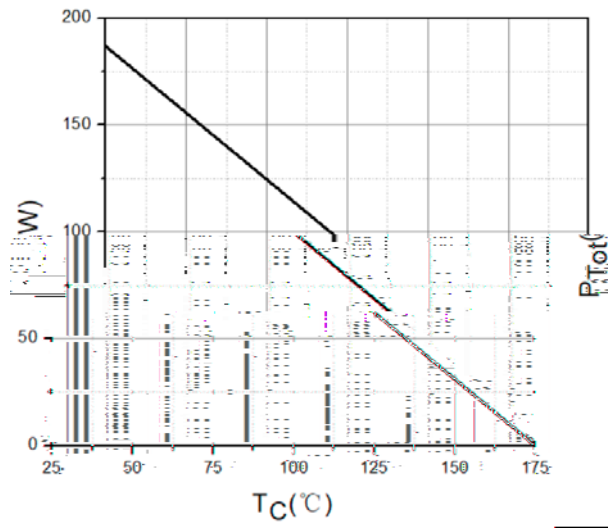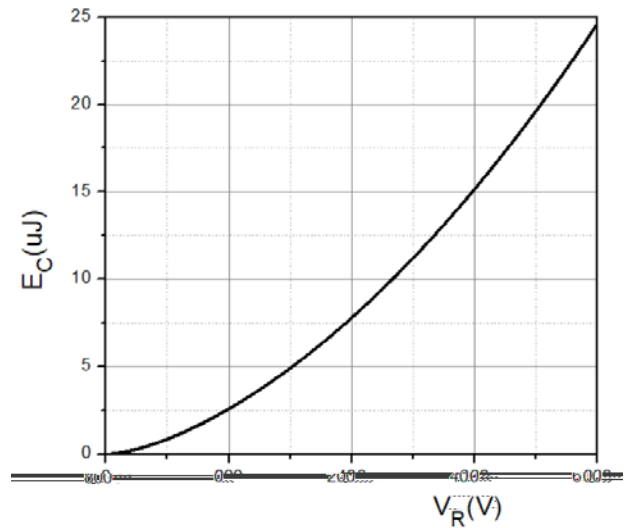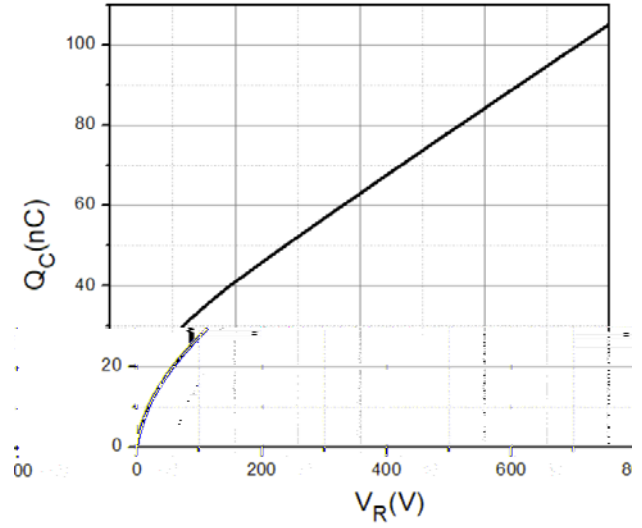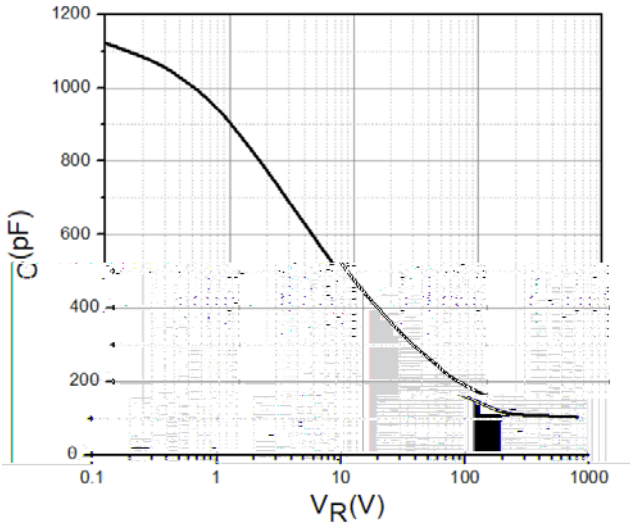



Typical Characteristics

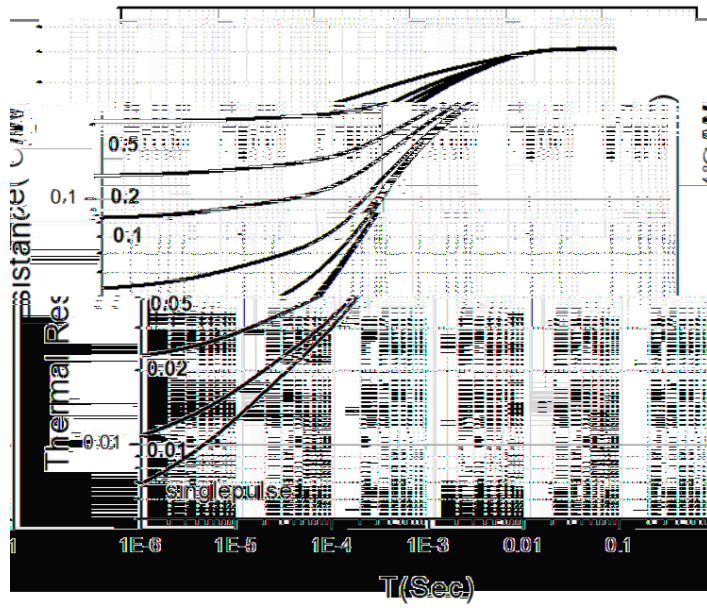




YJD106540NCTQG2

RoHS
COMPLIANT

Outline Dimensions

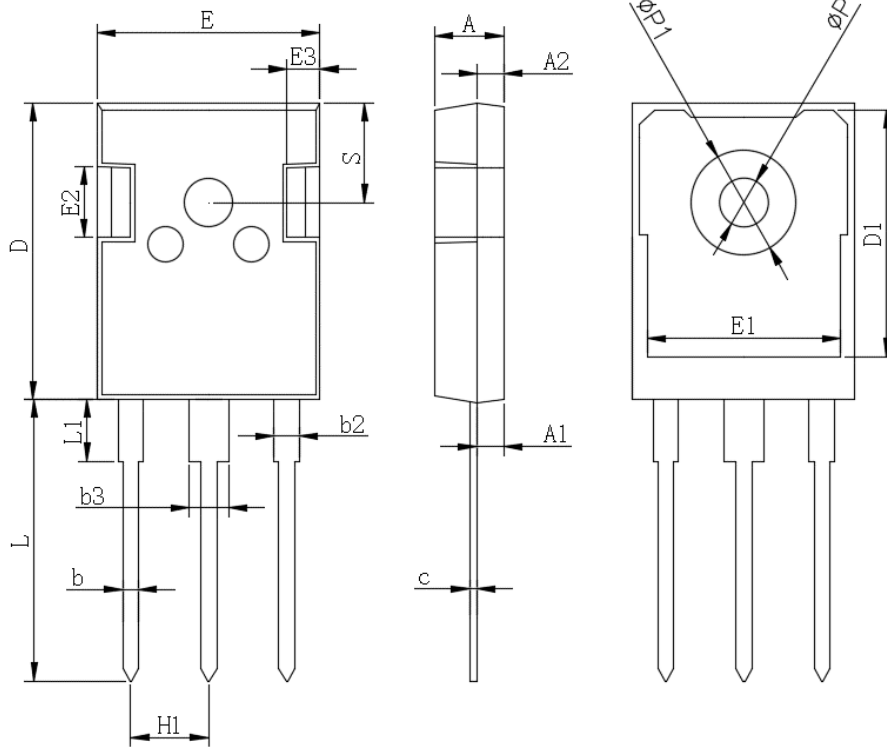

TQ-247AB																											
1	Max	Dim	Min																								
3	5.2	A	4.8																								
1	2.61	A1	2.2																								
5	2.15	A2	1.8																								
	1.4	b	1																								
1	2.21	b2	1.9																								
5	0.7	C	0.3																								
7	21.3	D	20																								
25	16.85	D1	16.2																								
5	16.1	E	15																								
<table border="1"> <tr> <td>E2</td> <td>4.8</td> <td>5.2</td> </tr> <tr> <td>E3</td> <td>2.3</td> <td>2.7</td> </tr> <tr> <td>L</td> <td>19.62</td> <td>20.22</td> </tr> <tr> <td>L1</td> <td>-</td> <td>4.3</td> </tr> <tr> <td>ΦP</td> <td>3.4</td> <td>3.8</td> </tr> <tr> <td>ΦP1</td> <td></td> <td>7.3</td> </tr> <tr> <td>S</td> <td colspan="2">6.15TYP</td> </tr> <tr> <td>H1</td> <td colspan="2">5.44TYP</td> </tr> </table>				E2	4.8	5.2	E3	2.3	2.7	L	19.62	20.22	L1	-	4.3	ΦP	3.4	3.8	ΦP1		7.3	S	6.15TYP		H1	5.44TYP	
E2	4.8	5.2																									
E3	2.3	2.7																									
L	19.62	20.22																									
L1	-	4.3																									
ΦP	3.4	3.8																									
ΦP1		7.3																									
S	6.15TYP																										
H1	5.44TYP																										

YJD106540NCTQG2
