


Fea e :

A lica i :

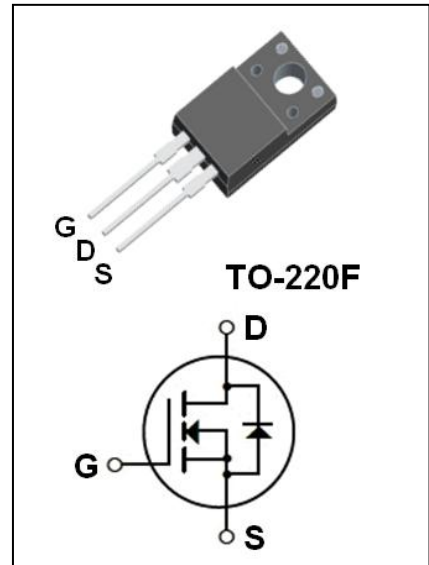

Ab l e Ma im m Ra i g °

		°	
		±	
		° )	
			°
			°
			°

\*

The mal Cha ac e i ic


			°
			°

**Electrical Characteristics**


<b>Off Characteristics</b>						
△		○				○
△		○				
<b>On Characteristics</b>						
<b>Dynamic Characteristics</b>						
<b>Switching Characteristics</b>						
<b>Thermal Resistance and Maximum Ratings</b>						

、  
、  
、  
、  
、  
、


**O -Regi Cha ac e i ic**

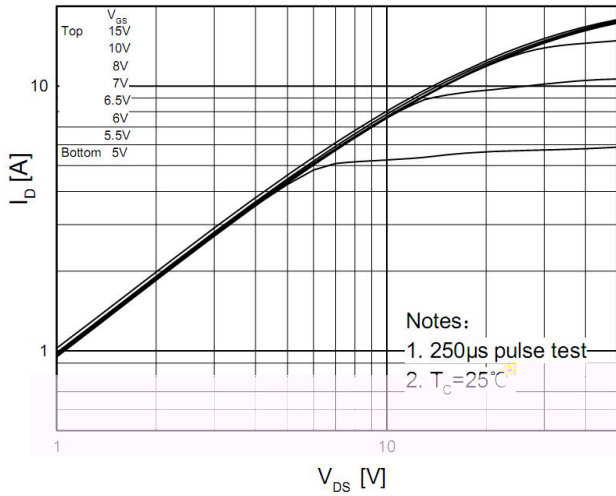


**T a fe Cha ac e i ic**

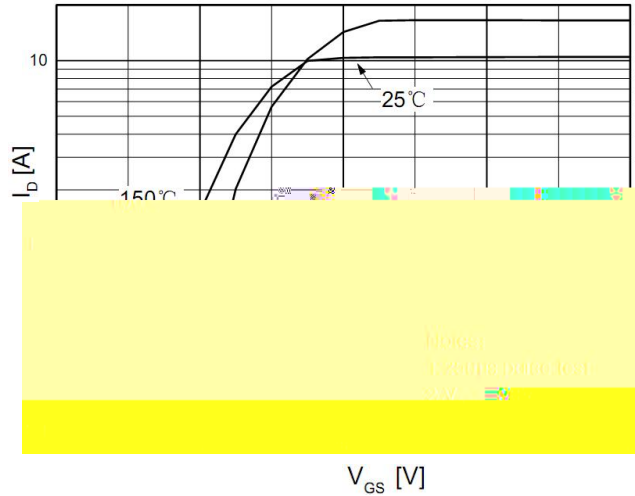


**O -Re i a ce Va i a i .  
D a i C e a d G a e V l a g e**

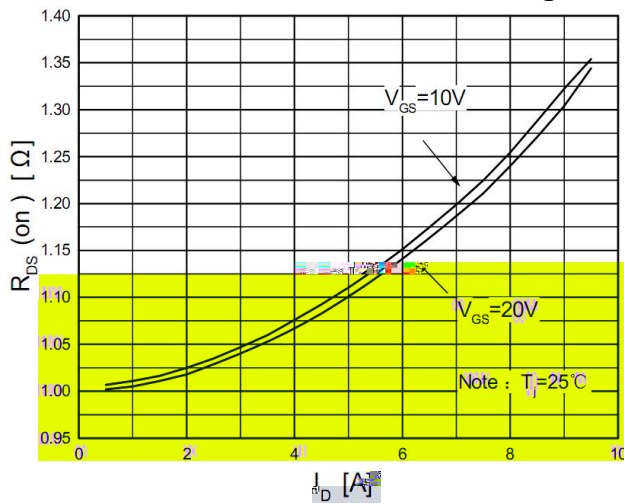


**B d Di de F a d V l a g e Va i a i .  
. S ce C e a d T e m e a e**

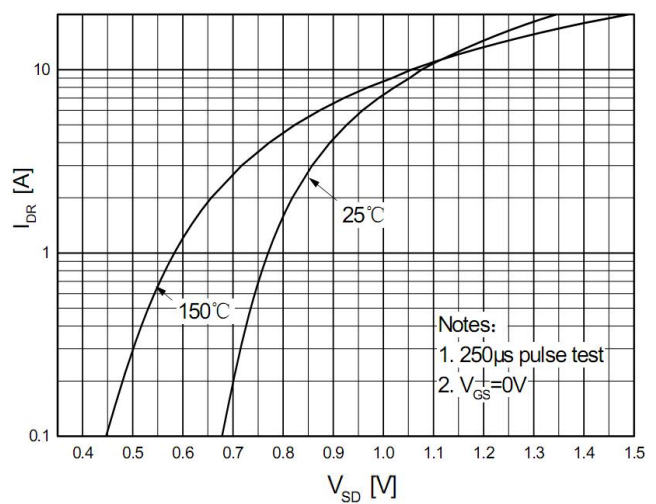


**Ca aci a ce Cha ac e i ic**

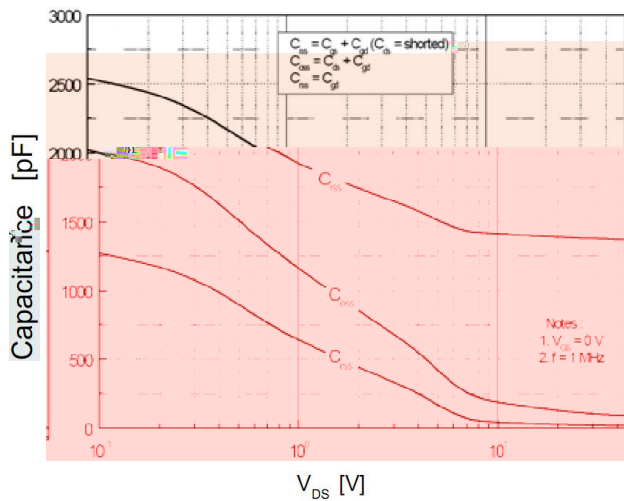


**G a e C h a g e C h a a c e i i c**

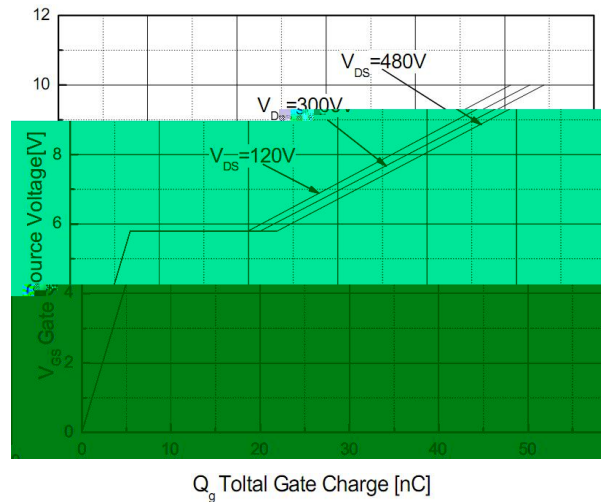


**Breakdown Voltage Variation with Temperature**

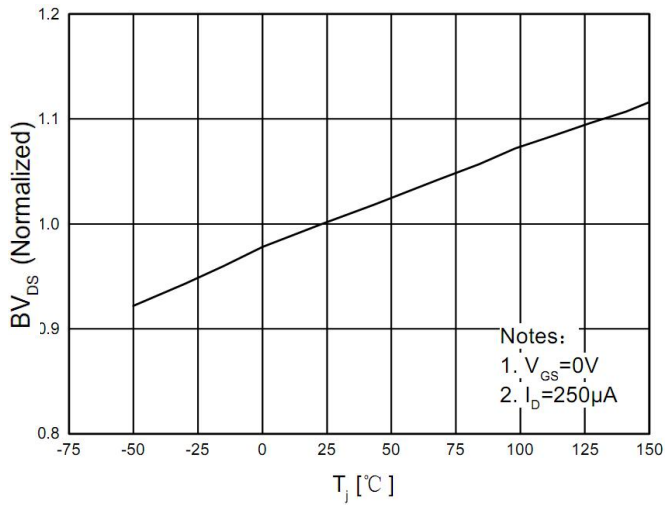


**On-Resistance Variation with Temperature**

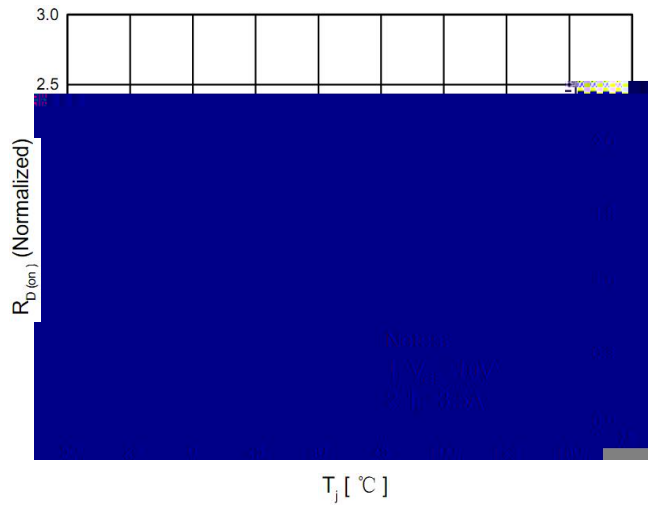

**Maximum Safe Operating Area**

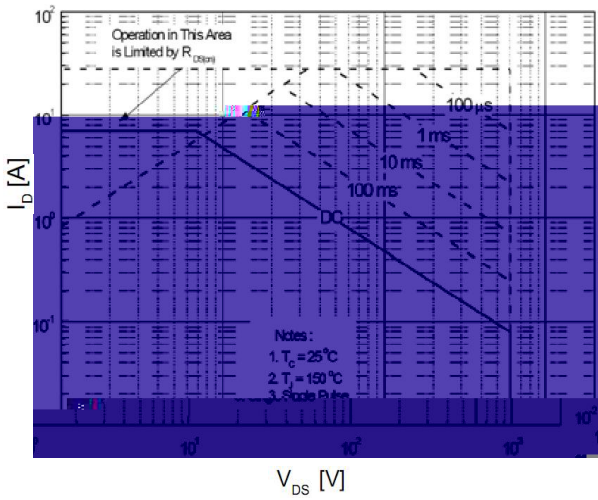

**Maximum Drain Current vs. Case Temperature**

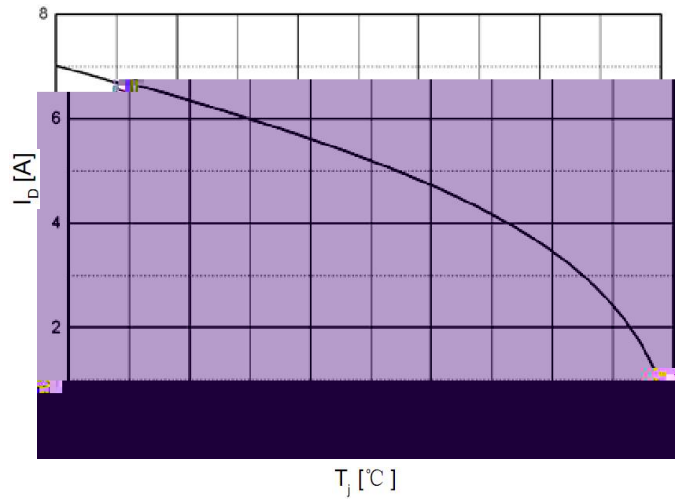

# TO-220F Package Dimensions

:

