

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

## 一级代理商：

深圳市弗瑞鑫电子有限公司

地址：深圳市宝安区西乡大道302号金源商务大厦B座三楼

frxelec


1.



2.

3.

4.

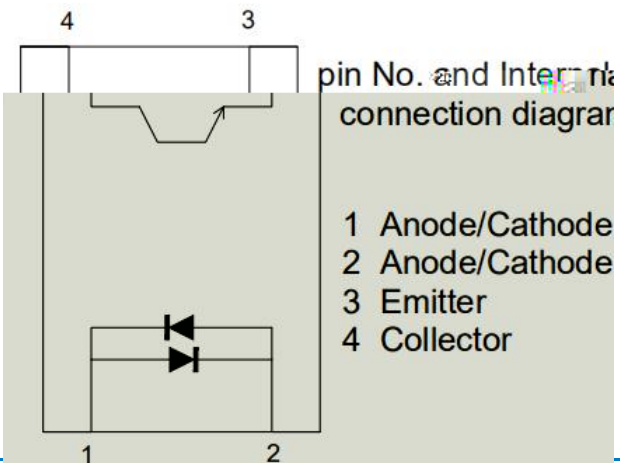


5.

6.

ДБ





λ  
»  
Λ  
0

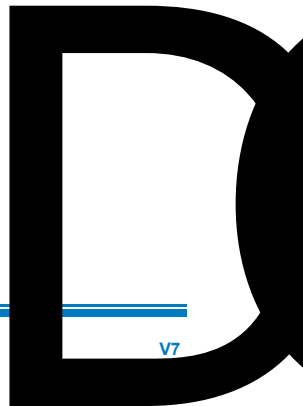

7.


8.

9.

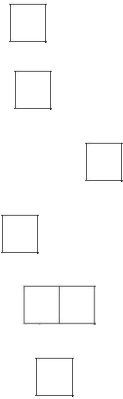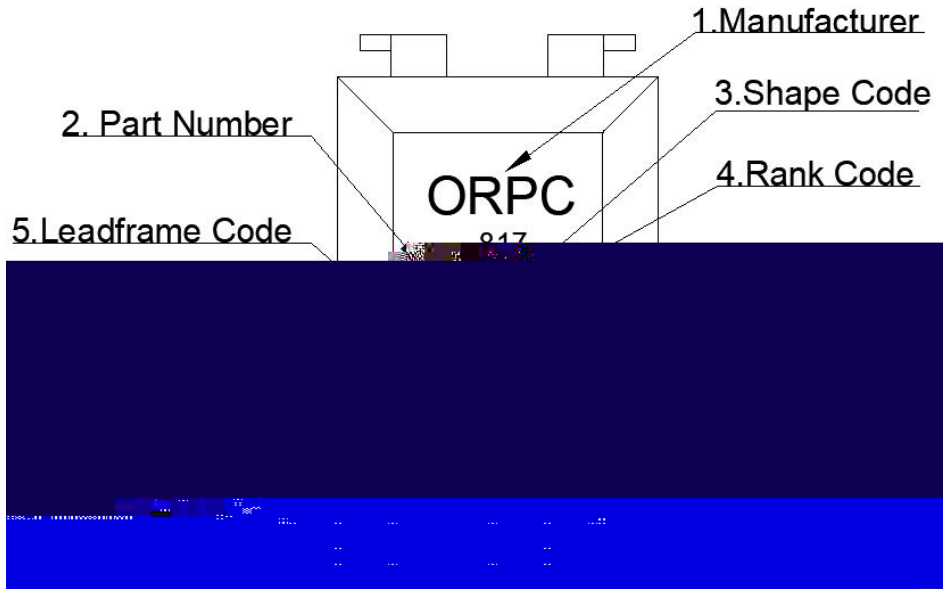


10.


1.

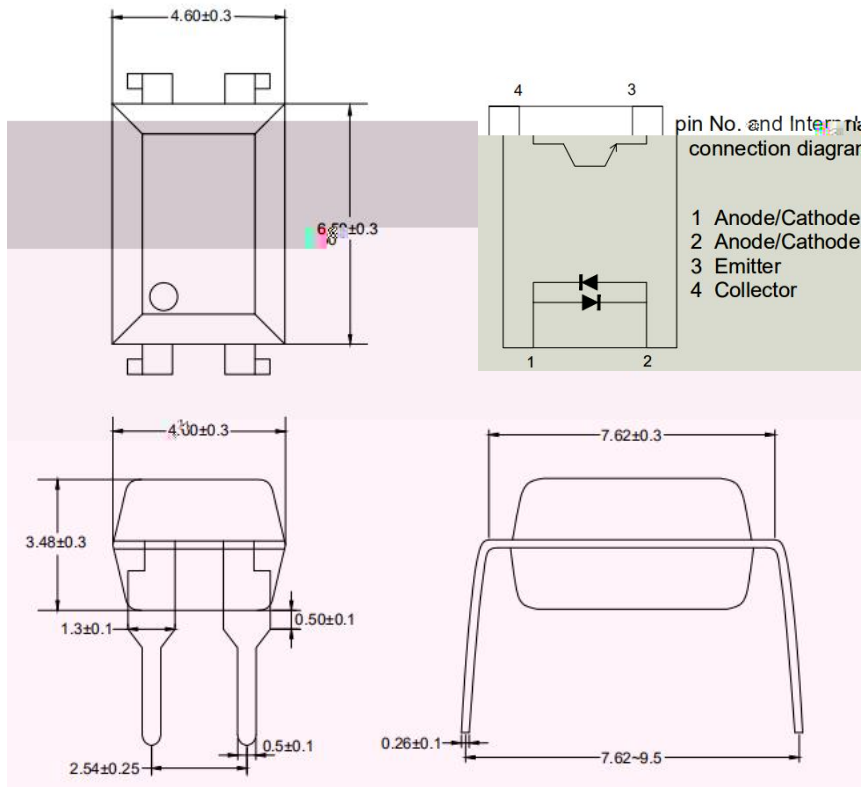


2.

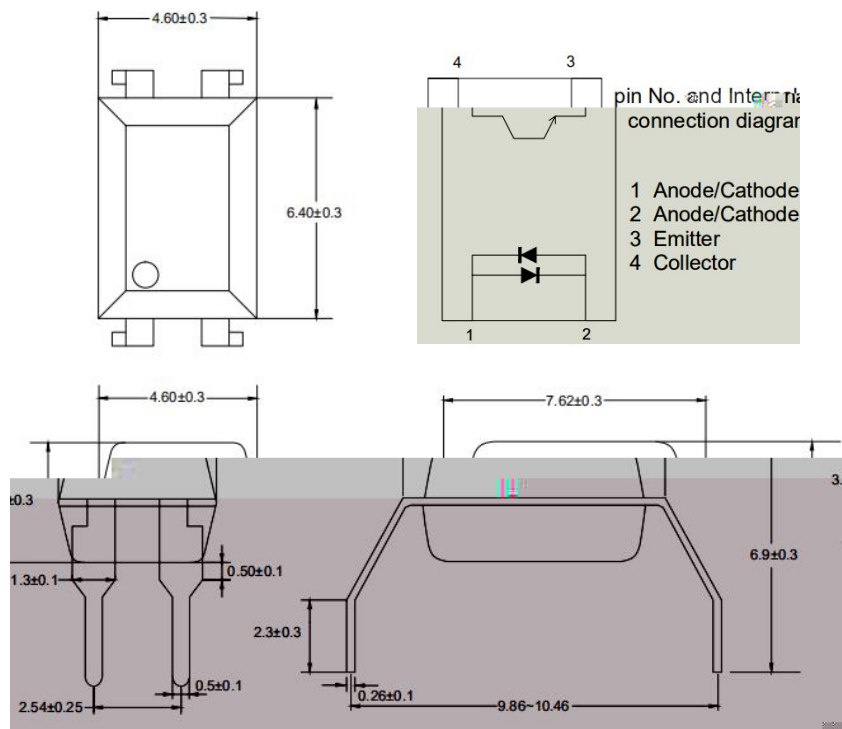

3.

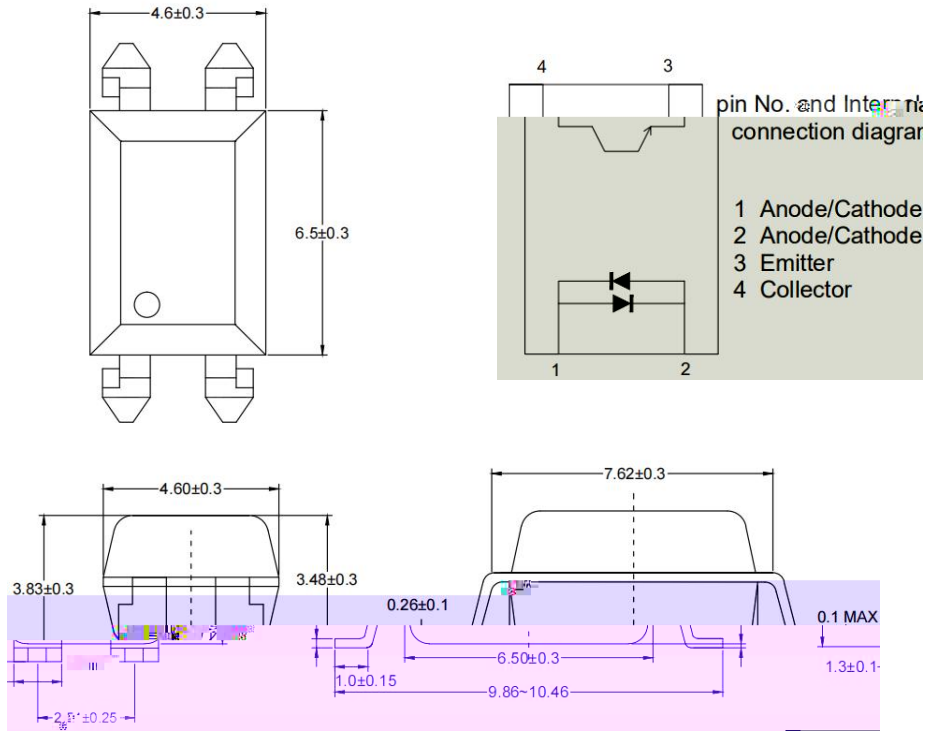

11.

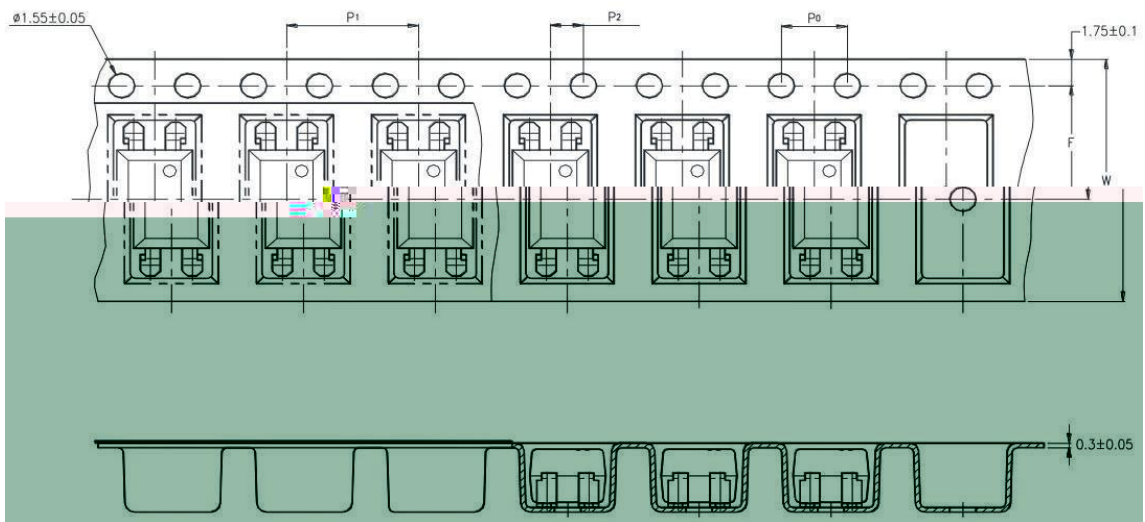




12.



14.

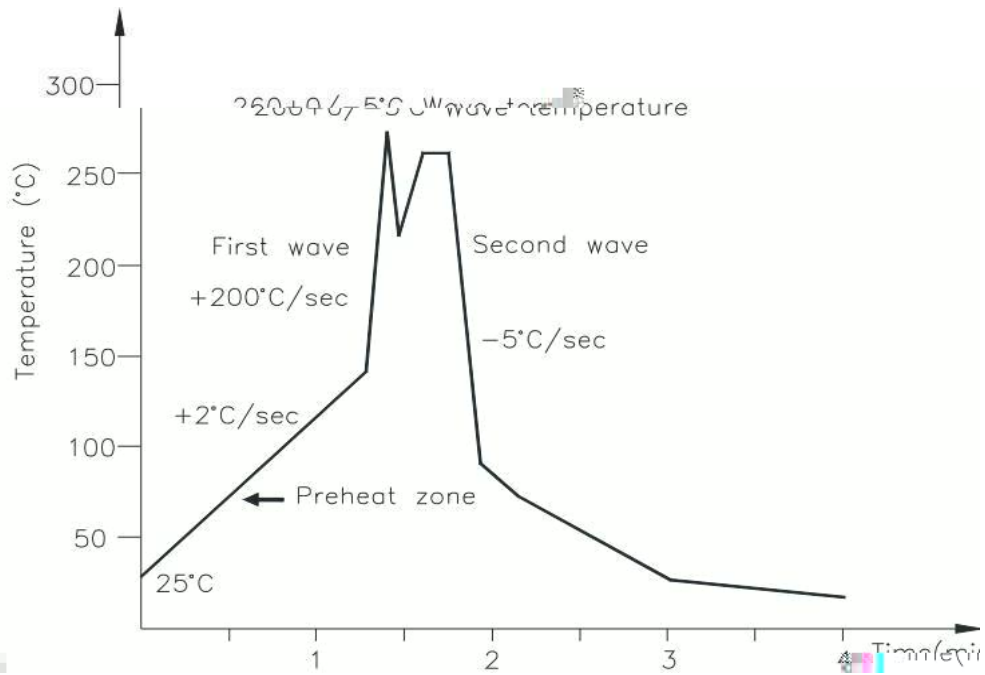

Temperature	380+0/-5°C
Time	3 sec max

16.

Fig.1 Forward current vs Ambient temperature

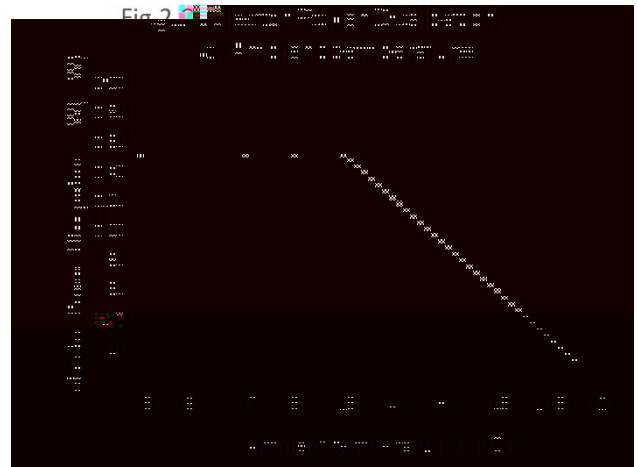
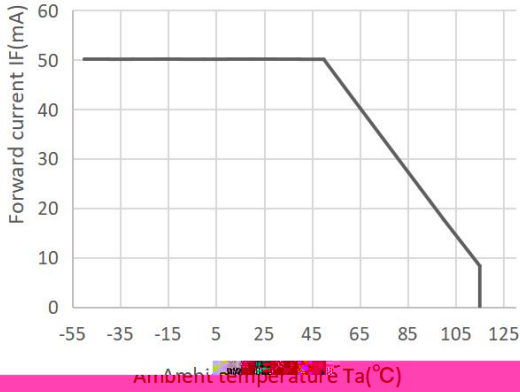


Fig.3 Collector-emitter Saturation Voltage vs. Forward Current

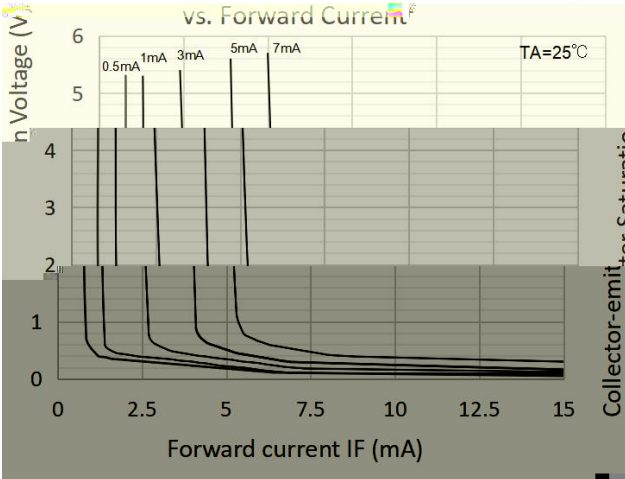


Fig.4 Forward Current vs. Forward Voltage

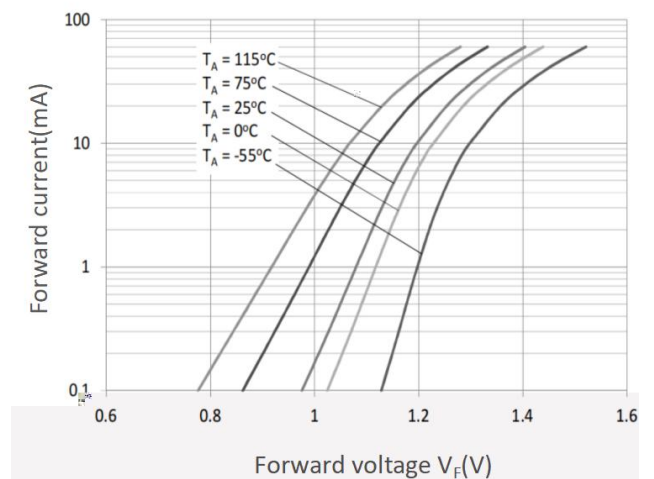


Fig.5 Forward Current vs. Current Transfer Ratio

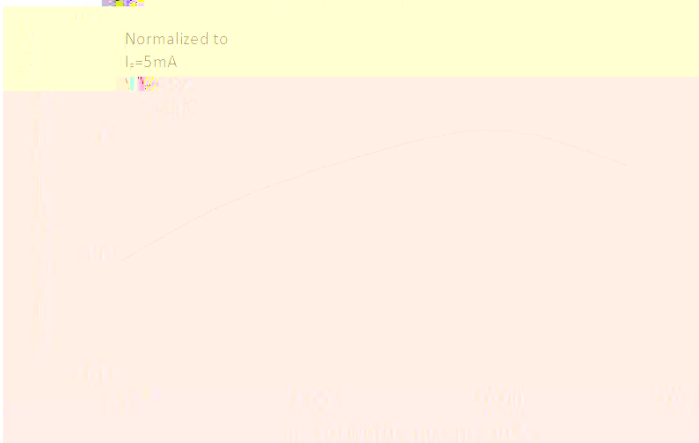


Fig.6 Collector Current vs. Collector-emitter Voltage

