



## 6.0A Single-Phase GLass Passivated Bridge Rectifiers

Recifier Reverse Voltage 50V to 1000V



### GBU

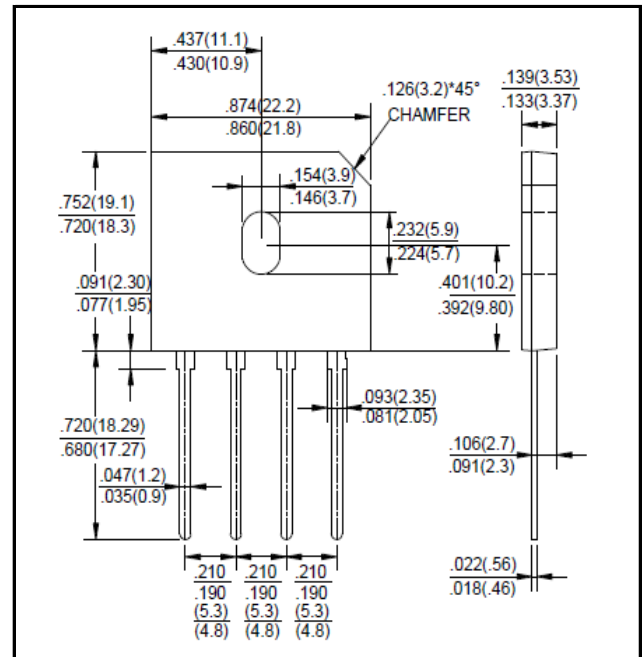

### Features

- Glass passivated junction
- The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- Suge overload ratings to 175 amperes peak
- Ideal for printed circuit board application
- High temperature soldering guaranteed 265°C/10

### Mechanical Data

Case: Molded plastic  
 Terminals: Platde leads solderable per MIL-STD-750, Method 2026  
 Polarity: Polarity symbols molded or Marked on body  
 Mounting Position: Any  
 Weight: 0.138ounce, 3.9 grams (approx)

### Maximum Ratings & Thermal Characteristics

Dimensions in inches and (millimeters)

Rating at 25°C ambient temperature unless otherwise specified, Resistive or inductive load, 60HZ.  
 For Capacitive load derate current by 20%

Parameter	Symbol	GBU6A	GBU6B	GBU6D	GBU6G	GBU6J	GBU6K	GBU6M	unit
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at TA=40°C	IF(AV)				6.0				A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	IFSM				175				A
Rating for fusing (t<8.3ms)	I <sup>2</sup> t				127				A <sup>2</sup> sec
Typical thermal resistance per element(1)	ReJA				2.2				°C/w
Mounting torque (Suggests 0.45~0.65)	Tor	Rating Torque: 0.8 (Suggests 0.45~0.65)							N.m
Typical thermal resistance per element(2)	Cj				50.0				PF
Operating junction and storage temperature range	TJ, TSTG				-55to+150				°C

### Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or inductive load, 60HZ.  
 For Capacitive load derate current by 20%

Parameter	Symbol	GBU6A	GBU6B	GBU6D	GBU6G	GBU6J	GBU6K	GBU6M	unit
Maximum instantaneous forward voltage drop per leg at 3.0A	VF				1.1				V
Maximum DC reverse current at ratde TA=25°C	IR				5				UA
DC blocking voltage per element TA=125°C					500				

Notes: (1) Device mounted on 75mm\*75mm\*1.6mm Cu plate heatsink.  
 (2) Measured at 1.0MHz and applied reverse voltage of 4.0 volts.

## Rating and Characteristic Curves (TA=25°C Unless otherwise noted)

FIG.1-DERATING CURVE FOR

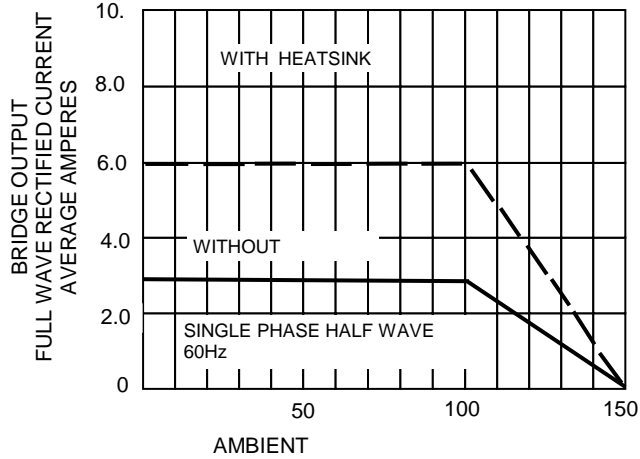


FIG.2-MAXIMUM NON-REPETITIVE SURGE CURRENT

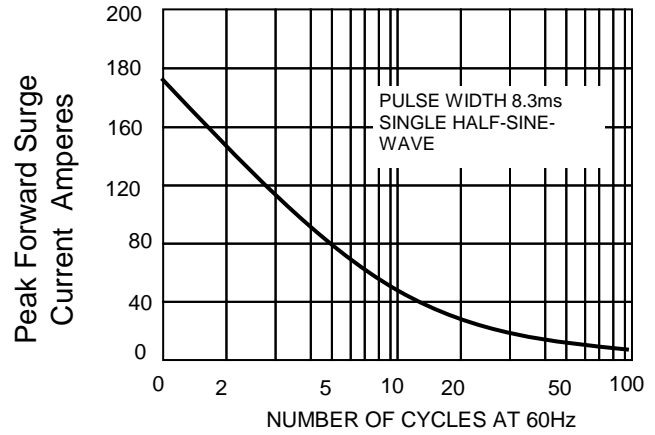


FIG.3-TYPICAL JUNCTION

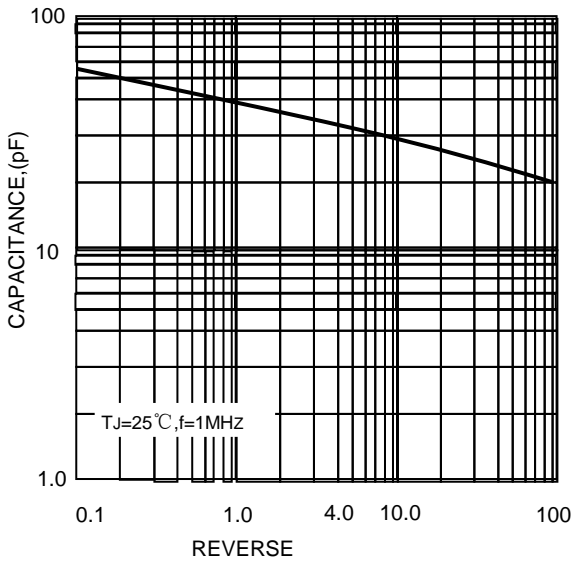


FIG.4-TYPICAL FORWARD CHARACTERISTICS

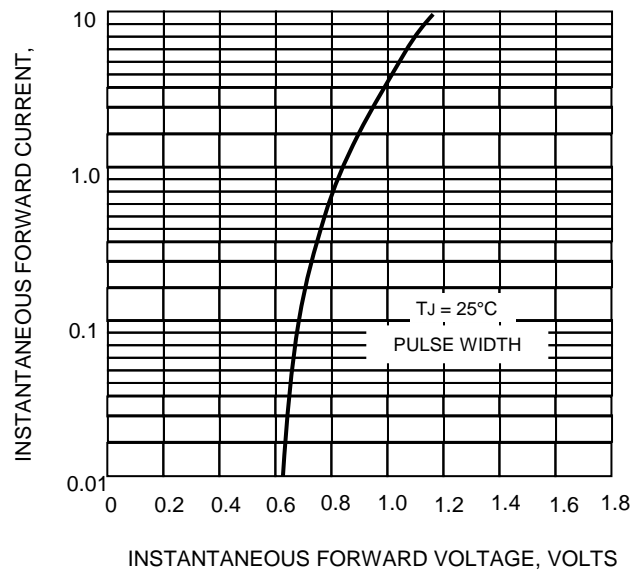


FIG.5-TYPICAL REVERSE CHARACTERISTICS

