



贴片保险丝(抗浪涌型)



SMD Fuse (High Inrush Current Withstand) 250V/125V

Time-Current Characteristics

电流-时间特性图



-55°C~+125°C

材料:

Materials:

End cap: Ag plated brass

Ceramic tube: ceramic

焊接方法:

Soldering Method:

Reflow soldering: 260°C, 10s max



Manual soldering: 380°C, 3s max

包装:

Packaging:

Automaton taped 1000PCS per reel,

30000PCS per carton

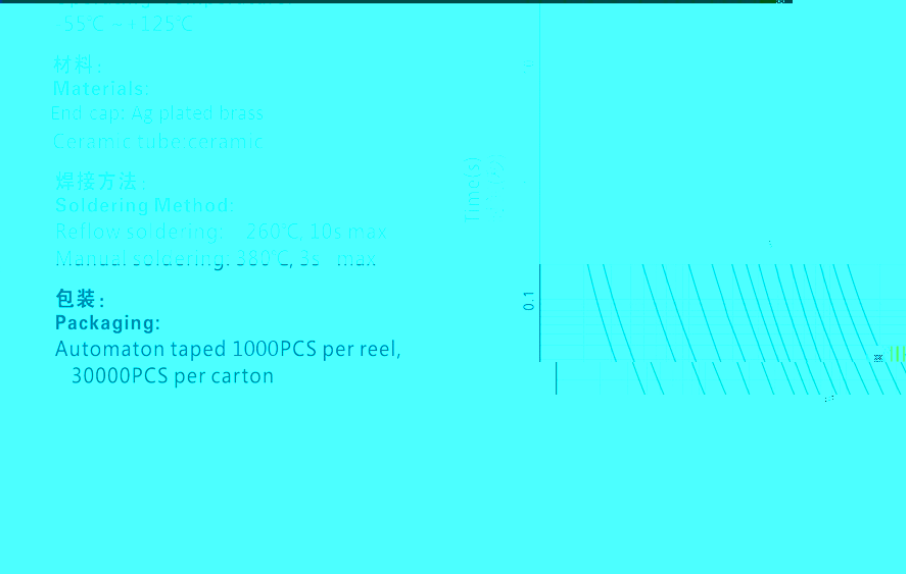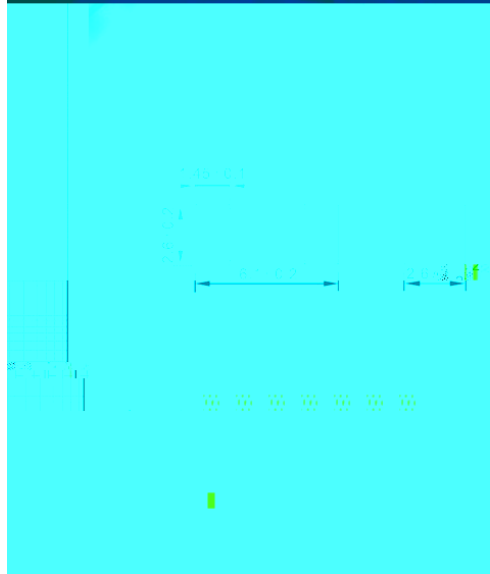

Time(s)

0.1

1

10

100

1000

10000

100000

1000000

10000000

100000000

1000000000

10000000000

100000000000

1000000000000

10000000000000

100000000000000

1000000000000000

10000000000000000

100000000000000000

1000000000000000000

10000000000000000000

100000000000000000000

1000000000000000000000

10000000000000000000000

100000000000000000000000

1000000000000000000000000

10000000000000000000000000

100000000000000000000000000

1000000000000000000000000000

10000000000000000000000000000

100000000000000000000000000000

1000000000000000000000000000000

10000000000000000000000000000000

100000000000000000000000000000000

1000000000000000000000000000000000

10000000000000000000000000000000000

